

Components

SKU	Description	Package Quantity
GEBI71-2	Tetra EdgeStrip 7100K	32 Modules
GEBI50-2	Tetra EdgeStrip 5000K	32 Modules
GEBI41-2	Tetra EdgeStrip 4100K	32 Modules
GEBI32-2	Tetra EdgeStrip 3200K	32 Modules
GEBIH71-2	Tetra EdgeStrip High Output 7100K	32 Modules
GEBIH50-2	Tetra EdgeStrip High Output 5000K	32 Modules
GEBIH41-2	Tetra EdgeStrip High Output 4100K	32 Modules
GEBIH32-2	Tetra EdgeStrip High Output 3200K	32 Modules
9409	18 AWG Supply Wire (0.82 mm ²)	500 ft./spool (152.4 m)
191600041	22-14 AWG Twist-On Wire Connectors (0.33 - 2.08 mm ²)	500/PK
192160004	18-14 AWG In-line Connectors (IDC) (0.82 - 2.08 mm ²)	500/PK

Technical Specifications

Specification Item	Wavelength	Typical Brightness (lumens/module)	LEDs/Module	Energy Consumption (Strip/Module)	Energy Consumption (System/Module)	Power Supply Loading	Viewing Angle
Tetra EdgeStrip	7100K, 5000K	300	7	2.52	2.96	36 Modules/100W PS	27 x 80°
	4100K, 3200K	282					
Tetra Edgestrip High Output	7100K, 5000K	550	7	5.40	6.17	17 Modules/100W PS	27 x 80°
	4100K, 3200K	500					

Specification Item	Tetra EdgeStrip															
Cutting Resolution	Cut on wire between every module															
Power Supply	GEPS24-25U-NA Input: 108-305VAC; Output: 24VDC GEPS24D-80U Input: 90-305VAC; Output: 24VDC GEPS24-100-NA Input: 108-305VAC; Output: 24VDC GEPS24-100-GL Input: 108-305VAC; Output: 24VDC GEPS24-180U Input: 90-305VAC; Output: 24VDC															
Maximum Supply Wire Limits	<table border="1"> <thead> <tr> <th>80W, 100W, 180W</th> <th>20W</th> <th>Supply Wire Gauge</th> </tr> </thead> <tbody> <tr> <td>20 ft. (6.1 m)</td> <td>120 ft. (36.6 m)</td> <td>18AWG/0.82mm² supply wire - 9409</td> </tr> <tr> <td>25 ft. (7.6 m)</td> <td></td> <td>16AWG/1.31mm² supply wire</td> </tr> <tr> <td>35 ft. (10.6 m)</td> <td></td> <td>14AWG/2.08mm² supply wire</td> </tr> <tr> <td>40 ft. (12.1 m)</td> <td></td> <td>12AWG/3.31mm² supply wire</td> </tr> </tbody> </table> <p><i>Wiring to be installed in accordance with Article 725 of the National Electric code (NEC).</i></p>	80W, 100W, 180W	20W	Supply Wire Gauge	20 ft. (6.1 m)	120 ft. (36.6 m)	18AWG/0.82mm ² supply wire - 9409	25 ft. (7.6 m)		16AWG/1.31mm ² supply wire	35 ft. (10.6 m)		14AWG/2.08mm ² supply wire	40 ft. (12.1 m)		12AWG/3.31mm ² supply wire
80W, 100W, 180W	20W	Supply Wire Gauge														
20 ft. (6.1 m)	120 ft. (36.6 m)	18AWG/0.82mm ² supply wire - 9409														
25 ft. (7.6 m)		16AWG/1.31mm ² supply wire														
35 ft. (10.6 m)		14AWG/2.08mm ² supply wire														
40 ft. (12.1 m)		12AWG/3.31mm ² supply wire														
Operating Environment	-40 °C to +60 °C															
Module Dimensions (h x l x w)	Tetra EdgeStrip: 0.59 x 1.98 x 5.45 Tetra EdgeStrip HO: 0.76 x 1.98 x 5.45															
Sign Dimensions	For best results, recommended sign depth is 3 inches (76mm) or greater For best results, recommended sign depth is 5 inches (127mm) or greater															
Warranty	GE offers a limited system warranty of up to five (5) years															
System Certifications	UL Recognized #E219167, UL Classified #E229508, CE, C-tick IP66 rated: separate enclosure required, damp location rated															



www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2015 GE.


SIGN104 (Rev 06/22/15)

GE
Lighting

Tetra® EdgeStrip

LED Lighting System

The cutting edge of uniform brightness.

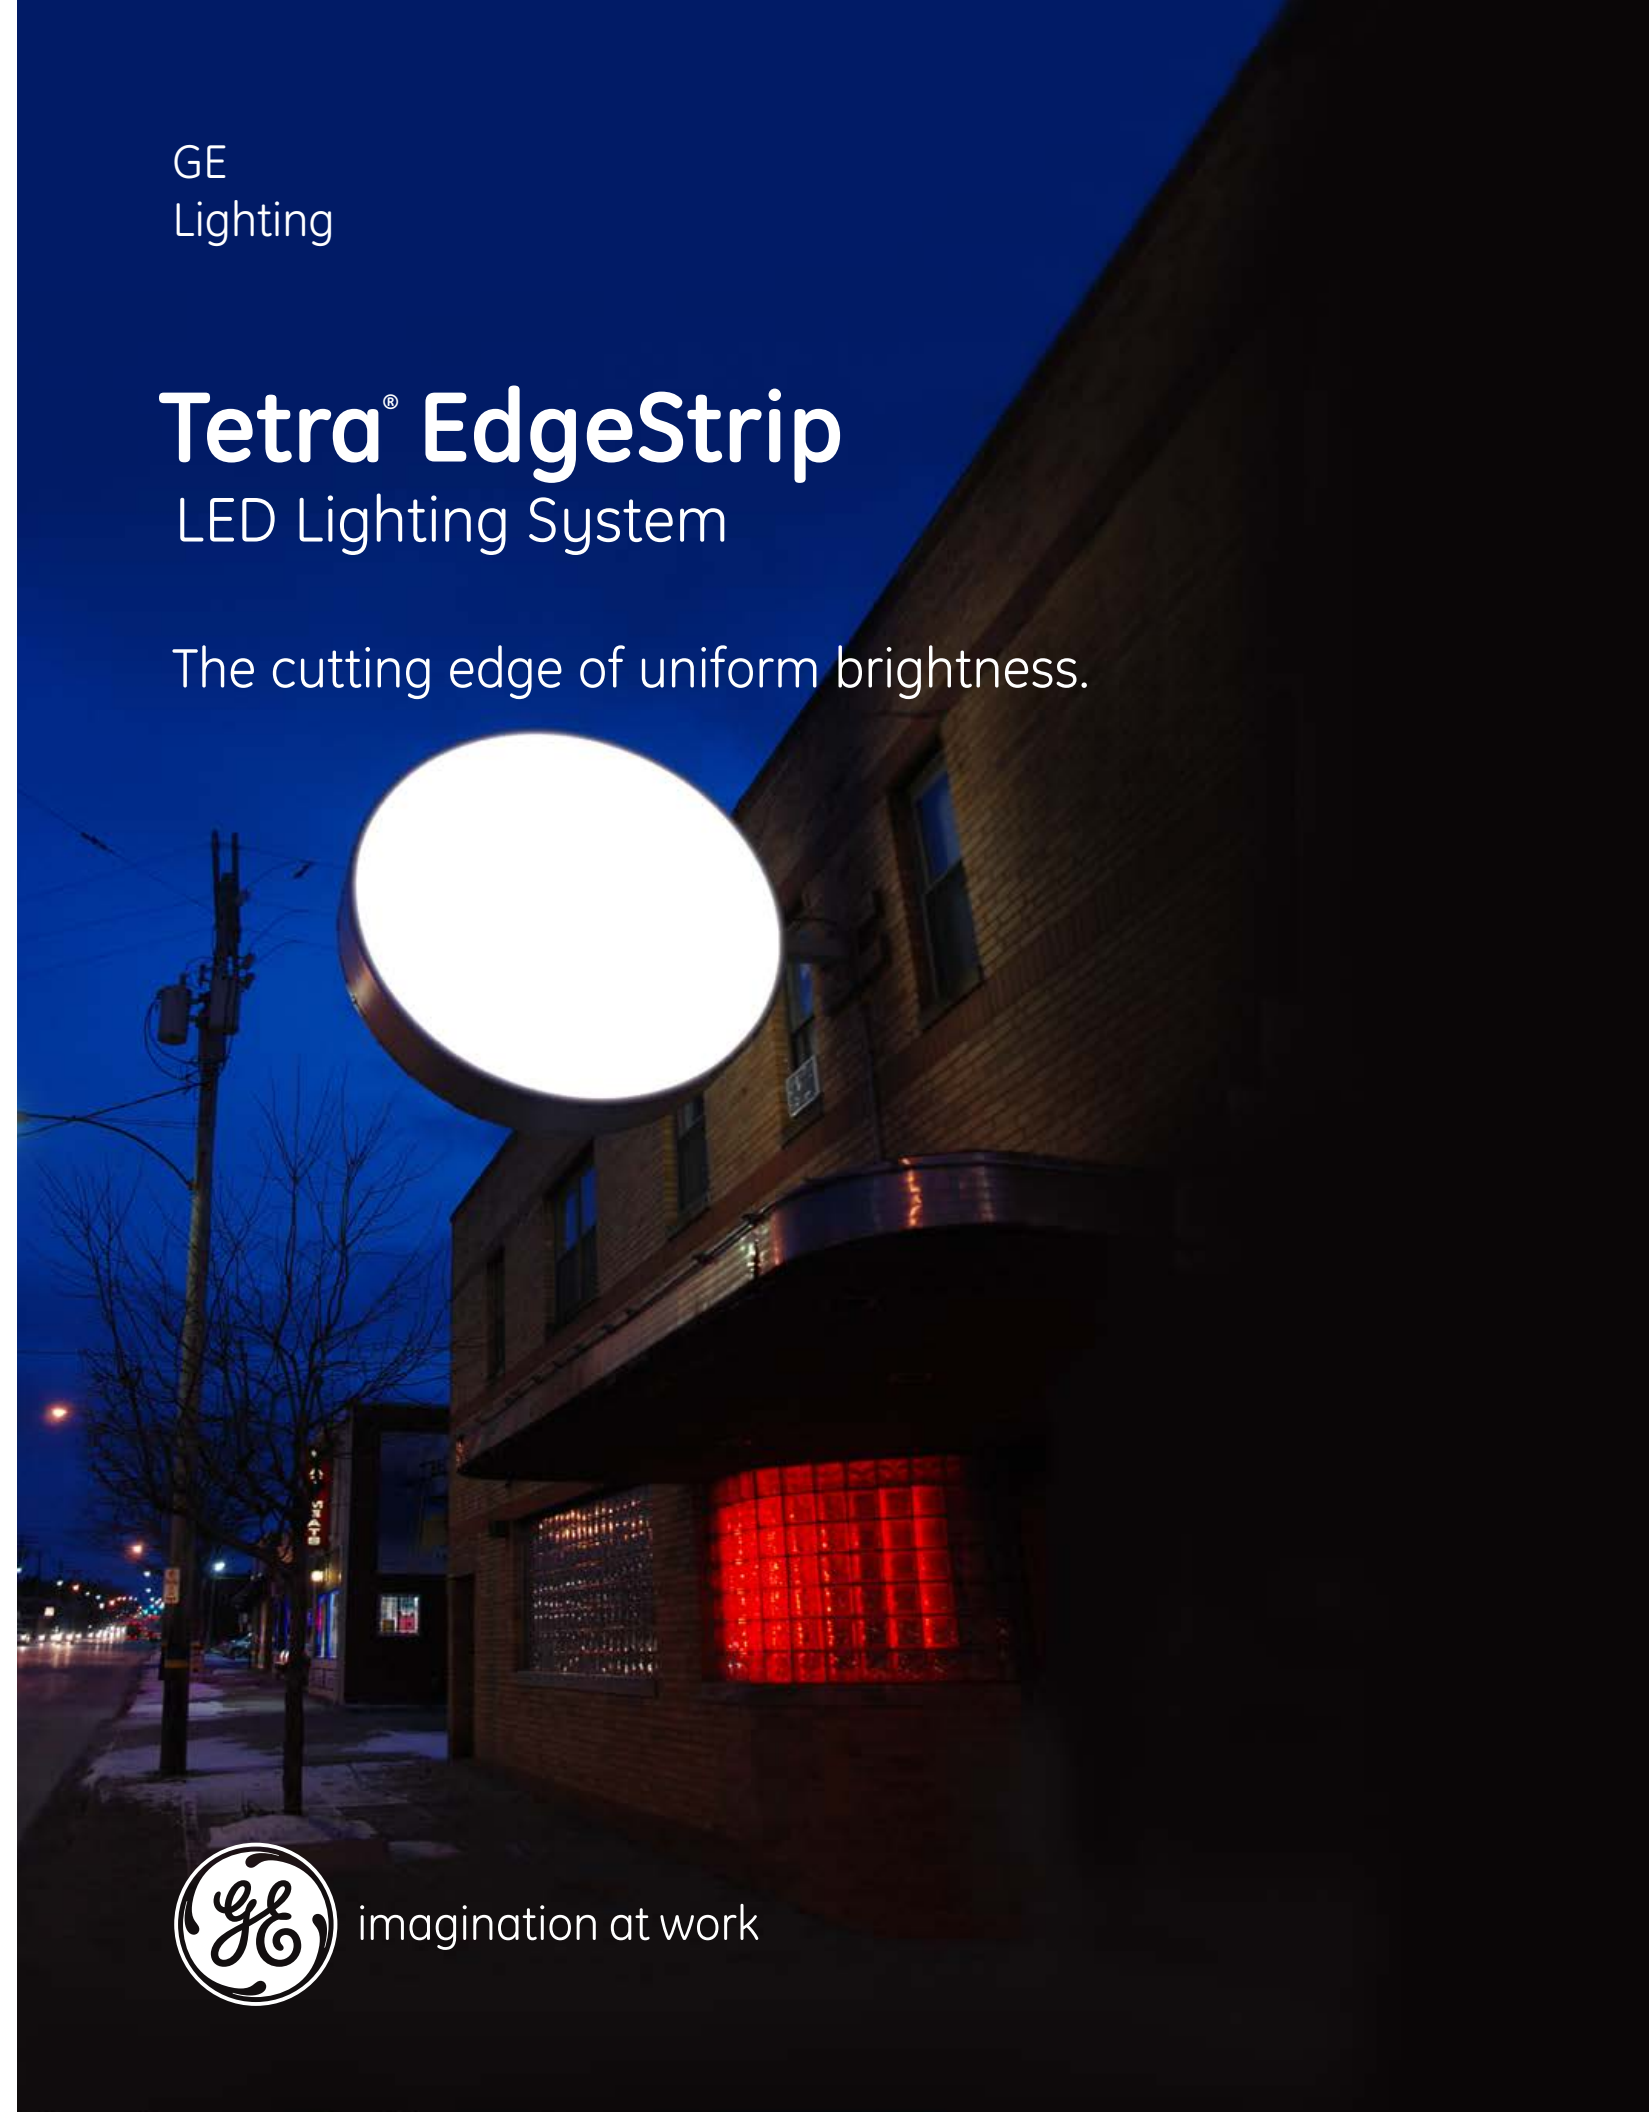


Tetra® EdgeStrip

Lighting from the Edge!

New **Tetra EdgeStrip** is engineered to install easily around the edge of signs with a 3 to 6 inch can depth. Perfect for single or double-sided signs, **Tetra EdgeStrip** delivers money-saving advantages over T8 fluorescent tubes while producing outstanding visual performance that protects end-user brand image. Discover the new LED alternative that can handle shallow cabinet signs — **Tetra EdgeStrip**.

The OptiLens™ Difference.

Tetra EdgeStrip uses OptiLens™, GE's unique lens technology which captures otherwise wasted light and redirects it towards the illuminated surface to create an exceptionally uniform sign.

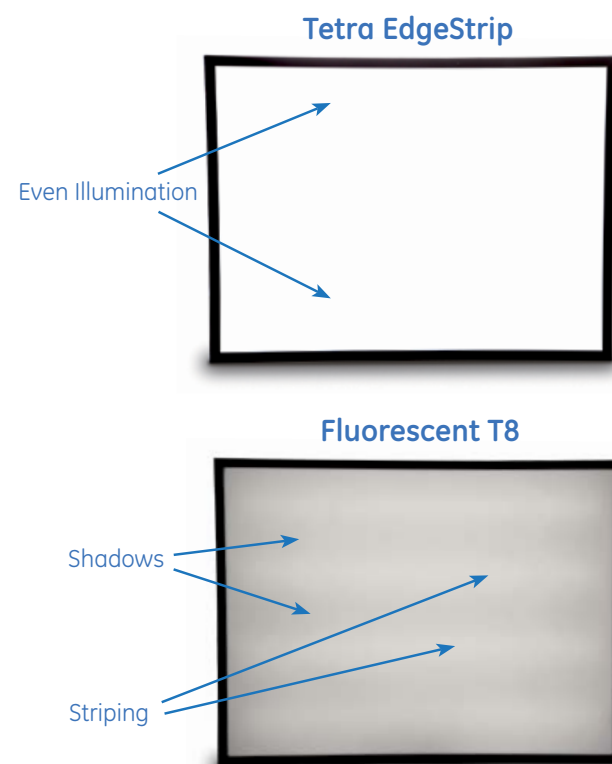

T8 fluorescent tubes can create an unwanted "striping" effect where the space between the tubes appears darker. This visual distraction sends the wrong message about your business, and undermines your overall brand image.

NEW! Tetra EdgeStrip

- **Tetra EdgeStrip** is now **brighter** than standard Tetra Edgestrip, commanding attention to your customer's brand image



- **300** lumens per foot with the same loading - 36 modules/24V/100W driver.

Don't settle for the *performance limitations* of T8 Fluorescent tubes.


Cover any angle or curved shape with uniform LED light.

Tetra EdgeStrip is designed to fit into the frame of cabinet signs, meaning that curved, angular or custom shaped signs can now benefit from LED technology! Unlike fluorescent tubes, that are hard to fit into unique signs and create shadows and stripping, Tetra EdgeStrip can tightly follow the contour of the sign's frame and distribute uniform light to every inch of the sign face. Protect the brand image of your business by using Tetra EdgeStrip LED lighting system in your sign!



Impressive Energy Savings.

When you make the switch from T8 Fluorescent tubes to the advanced technology of Tetra EdgeStrip, you give up some brightness for the exceptional uniformity and impressive energy savings of LED. This superior efficiency produces energy savings up to an incredible 78%. Imagine the positive impact that will have on your bottom-line over the long life of the system.

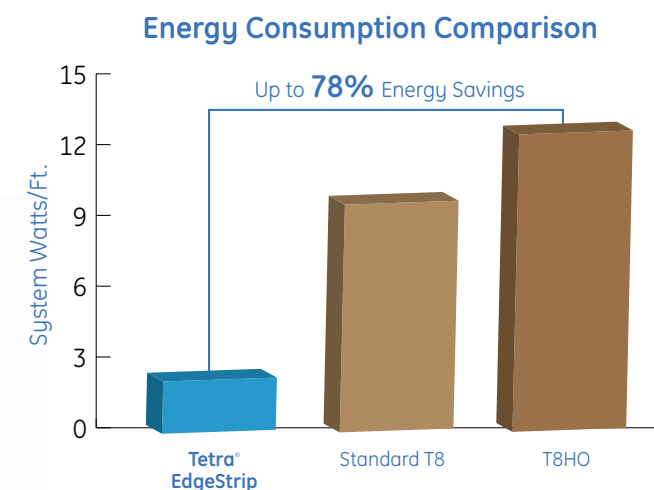

NEW! Tetra® EdgeStrip

